


LASER MARKED
ORBIS
 25 kV 55-5
 IP25F-138
 MM/YYYY

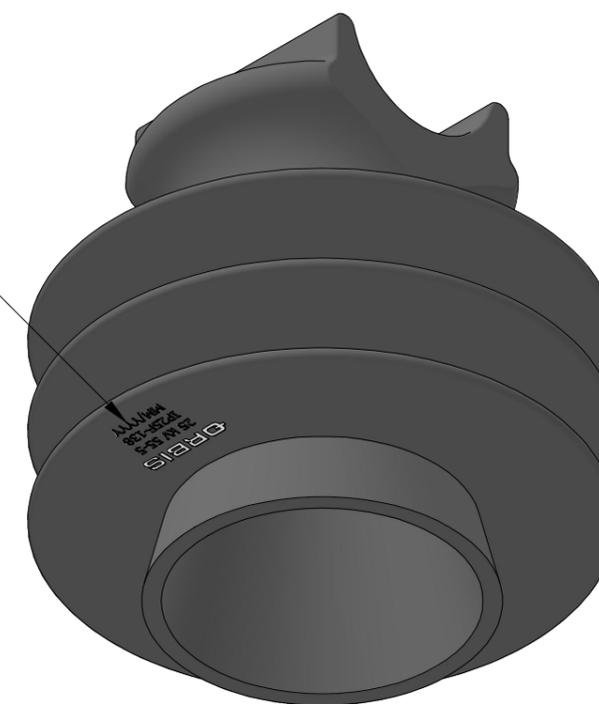

NOTES:
 MATERIAL: UV RESISTANT HDPE
 NECK DESIGNATION: F
 ELECTRICAL APPLICATION: 25kV
 CREEPAGE DISTANCE: 393mm
 DRY-ARC DISTANCE: 177mm
 FLASHOVER 60 HZ:
 WET - 45kV
 DRY - 85kV
 IMPULSE FLASHOVER VOLATGE:
 POS. - 140kV
 NEG. - 170kV
 LOW FREQUENCY PUNCTURE: 115kV
 CANTILEVER LOAD: 13 kN

THIS DRAWING
 CONTAINS
 CONFIDENTIAL
 INFORMATION
 AND IS THE
 EXCLUSIVE
 PROPERTY OF
 ORBIS
 MANUFACTURING

ORBIS

| | | | |
|----------|-----|------|------------|
| DRAWN | MSM | DATE | 27-10-2025 |
| APPROVED | RD | DATE | 31-10-2025 |
| REVISION | - | - | - |

DRAWING NUMBER

IP25F-138

DESCRIPTION

INSULATOR PIN 25KV F NECK FOR
 1-3/8" PIN (ANSI 55-5)