


LASER MARKED
ORBIS
 25 kV 55-5
 IP25J-1
 MM/YYYY

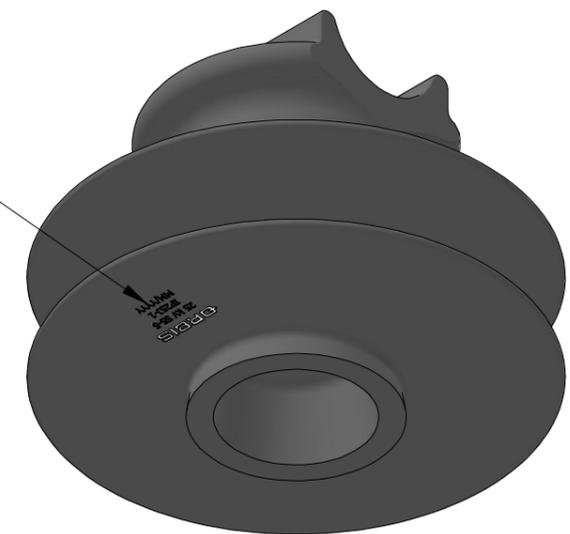

NOTES:
 MATERIAL: UV RESISTANT HDPE
 NECK DESIGNATION: J
 ELECTRICAL APPLICATION: 25kV
 CREEPAGE DISTANCE: 360mm
 DRY-ARC DISTANCE: 203mm
 FLASHOVER 60 HZ:
 WET: 45kV
 DRY: 85kV
 IMPULSE FLASHOVER VOLATGE:
 POS.: 140kV
 NEG.: 170kV
 LOW FREQUENCY PUNCTURE: 135kV
 LOW FREQUENCY TEST VOLTAGE: 22kV
 MAX RIV AT 1000kHz 100uV
 CANTILEVER LOAD: 13KN

THIS DRAWING
 CONTAINS
 CONFIDENTIAL
 INFORMATION
 AND IS THE
 EXCLUSIVE
 PROPERTY OF
 ORBIS
 MANUFACTURING

ORBIS

DRAWN	MSM	DATE	27-10-2025
APPROVED	RD	DATE	31-10-2025
REVISION	-	-	-

DRAWING NUMBER

IP25J-1

DESCRIPTION

INSULATOR PIN 25KV J NECK FOR 1"
 PIN (ANSI 55-5)