SR NO	PART NUMBER	DESCRIPTION	THREAD (T)	LENGTH (L)	THREAD LENGTH (A)	A/F	DEPTH (D)	SHANK DIA (d)	NECK DIA (N)
1	SLFD383*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 3/8" x 3"	3/8	3	2	9/16	1/4	0.29	0.375
2	SLFD384*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 3/8" x 4"	3/8	4	2-1/2	9/16	1/4	0.29	0.375
3	SLFD123*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 3"	1/2	3	2	3/4	11/32	0.438	0.5
4	SLFD124*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 4"	1/2	4	2-5/8	3/4	11/32	0.438	0.5
5	SLFD12412*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 4-1/2"	1/2	4-1/2	2-5/8	3/4	11/32	0.438	0.5
6	SLFD125*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 5"	1/2	5	3	3/4	11/32	0.438	0.5
7	SLFD126*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 6"	1/2	6	3	3/4	11/32	0.438	0.5
8	SLFD585*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 5/8" x 5"	5/8	5	3	15/16	1/2	0.5	0.625
9	SLFD586*	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 5/8" x 6"	5/8	6	3	15/16	1/2	0.5	0.625

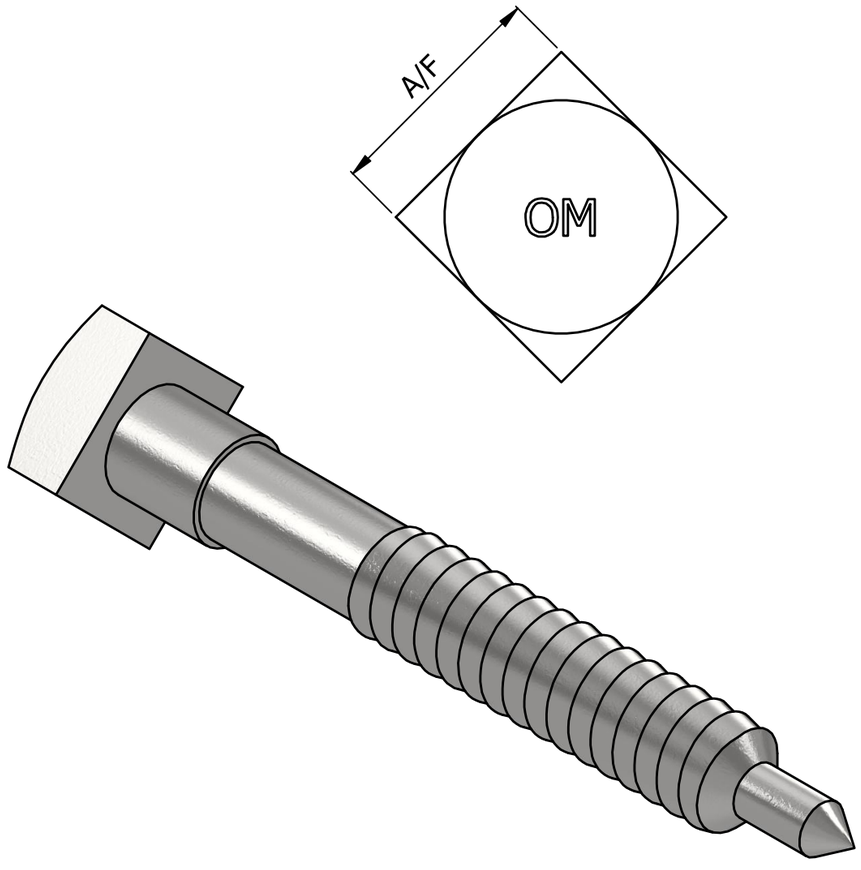

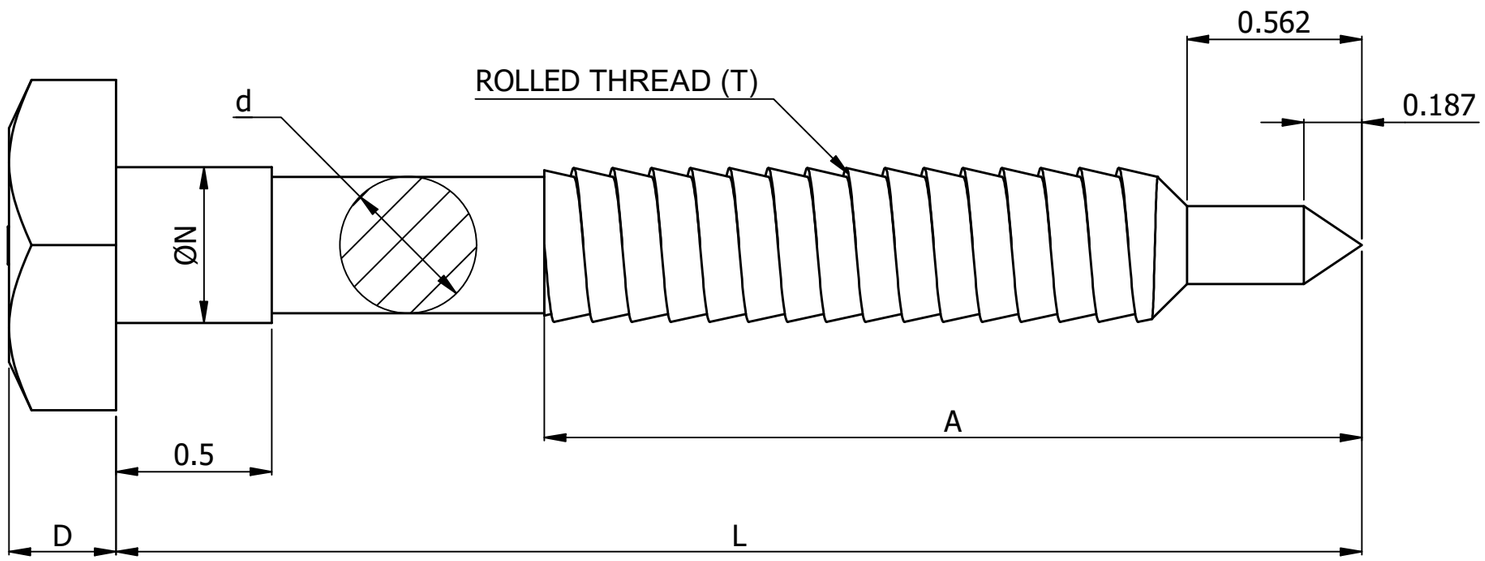

NOTE:
1. GALVANIZED AS PER ASTM A153.
2. MATERIAL: HOT ROLLED CARBON STEEL OR STAINLESS STEEL AS SPECIFIED.
3. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
4. UPSET SHOULDER DIAMETER IS EQUAL TO THE THREAD DIAMETER.
5. FOR PART NUMBERS WITH * DENOTATION ADD SUFFIX '**S**' FOR 304 GRADE STAINLESS STEEL OR '**SS**' FOR 316 STAINLESS STEEL GRADE.

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE EXCLUSIVE PROPERTY OF ORBIS MANUFACTURING

ORBIS

DRAWN	MSM	DATE	11-08-2023
APPROVED	DMM	DATE	18-08-2023
REVISION	R1	RD	06-12-2025

DRAWING NUMBER

SLFDXXX

DESCRIPTION

SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD