


SR NO	PART NUMBER	DESCRIPTION	THREAD (T)	LENGTH (L)	THREAD LENGTH (A)	A/F	DEPTH (D)
1	SLFD383	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 3/8" x 3"	3/8	3	2	9/16	1/4
2	SLFD384	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 3/8" x 4"	3/8	4	2-1/2	9/16	1/4
3	SLFD123	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 3"	1/2	3	2-1/4	3/4	11/32
4	SLFD124	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 4"	1/2	4	2-5/8	3/4	11/32
5	SLFD12412	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 4-1/2"	1/2	4-1/2	2-5/8	3/4	11/32
6	SLFD125	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 5"	1/2	5	3	3/4	11/32
7	SLFD126	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 1/2" x 6"	1/2	6	3	3/4	11/32
8	SLFD585	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 5/8" x 5"	5/8	5	3	15/16	1/2
9	SLFD586	SCREW LAG FETTER DRIVE WITH DRIVE POINT SQUARE HEAD 5/8" x 6"	5/8	6	3	15/16	1/2

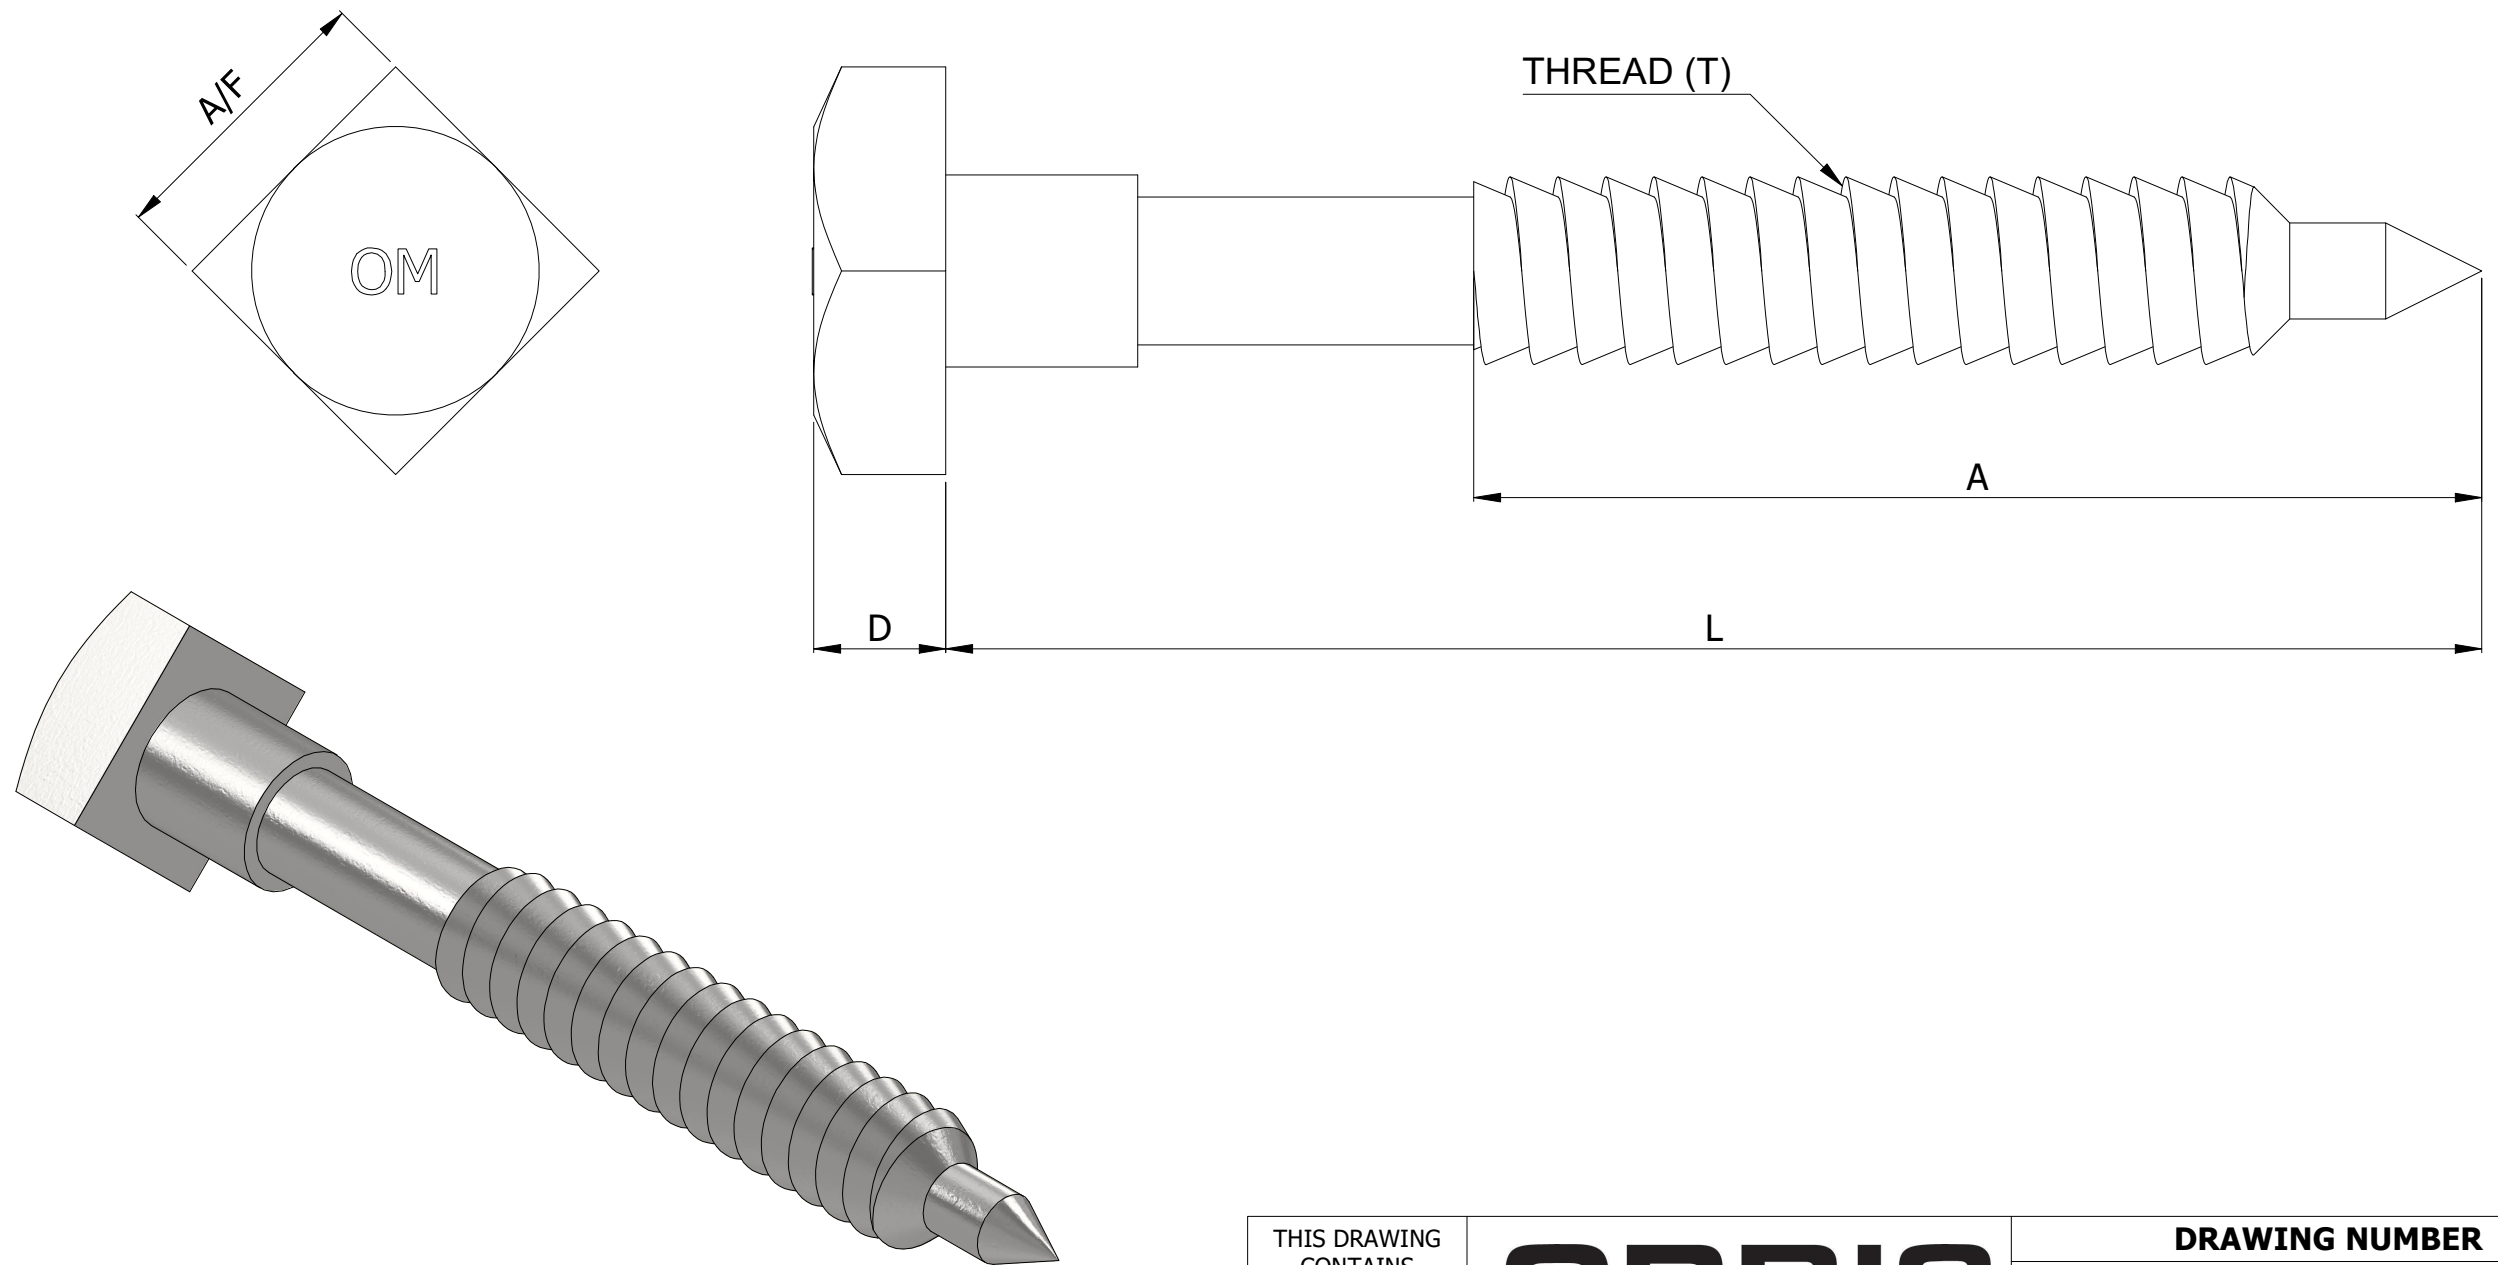

NOTE:-

1. GALVANIZED AS PER ASTM A153.
2. MATERIAL: HOT ROLLED CARBON STEEL.
3. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
4. UPSET SHOULDER DIAMETER IS EQUAL TO THE THREAD DIAMETER.

THIS DRAWING  
CONTAINS  
CONFIDENTIAL  
INFORMATION  
AND IS THE  
EXCLUSIVE  
PROPERTY OF  
ORBIS  
MANUFACTURING

**ORBIS**

DRAWN	MSM	DATE	11-08-2023
APPROVED	DMM	DATE	18-08-2023
REVISION	DMM	R1	01-06-2024

**DRAWING NUMBER**

SLFDXXX

**DESCRIPTION**

SCREW LAG FETTER DRIVE WITH  
DRIVE POINT SQUARE HEAD